

Ensim® Pro 4.0.1 for Windows® 2003 Technical Reference Guide

September 7, 2005

About this guide

Introduction	iii
Intended audience.....	iii
Printer-friendly version (for HTML documents).....	iii
Required skills.....	iii
Related documentation	iv
Document conventions.....	iv
Feedback and support	v

Chapter 1

Command Line Interface (CLI) Calls

Introduction	1-1
How to execute CLI calls.....	1-1
Overview of Command Line Interface (CLI) calls.....	1-2
Adding an object	1-3
Adding a reseller.....	1-4
Adding a site.....	1-4
Adding a user template.....	1-5
Description of parameters used for creating a user template and updating a user	1-7
Adding a user.....	1-8
Deleting an object	1-9
Deleting a reseller.....	1-9
Deleting a site.....	1-9
Deleting a user template.....	1-10
Deleting a user.....	1-10
Displaying the information of an object	1-10
Displaying the information of a reseller.....	1-10
Displaying the information of a site.....	1-11
Updating the information of an object	1-11
Updating the information of a reseller.....	1-11
Updating the information of a site.....	1-13
Description of parameters used for updating a site	1-17
Updating the information of a user.....	1-21

Exporting and importing site information.....	1-23
Exporting site information	1-23
Importing site information	1-24

Chapter 2

Changing the network settings of your server

Introduction	2-1
Changing the network settings of Ensim Pro server.....	2-1
Adding a new IP address to your server's network card.....	2-5

Index

Index-1

Legal and copyright notice

About this guide

Introduction

This guide provides information on the Command Line Interface (CLI) commands and shows you how to change the network settings of your server using Ensim[®] Pro 4.0.1 for Windows[®] 2003.

Chapters in this guide include:

- [Chapter 1, “Command Line Interface \(CLI\) Calls”](#)
- [Chapter 2, “Changing the network settings of your server”](#)



For simplicity, we refer to Ensim Pro 4.0.1 for Windows 2003 as “Ensim Pro” throughout this document.

Intended audience

This guide is meant for advanced users of Ensim Pro, including system administrators and technical support staff of Internet service providers (ISPs) who are using Ensim Pro.

Printer-friendly version (for HTML documents)

This document is presented in HTML and PDF formats. If you are viewing this document in HTML format and want to print it in a book style with numbered pages, access the Adobe[®] PDF version.

Required skills

To use this guide, you need to be familiar with the working of Ensim Pro. In addition, you should have some or all of the following skills.

- Using the Windows 2003 command prompt
- Understanding of HTML and DTML

Related documentation

For additional information about installation issues and help with product functions refer to the following documents at <http://www.ensim.com/support/pro/win2003/index.html>.

- Ensim Pro 4.0.1 for Windows 2003 Release Notes
- Ensim Pro 4.0.1 for Windows 2003 Installation Guide
- Ensim Pro 4.0.1 for Windows 2003 Mail API Guide

You can access the online Help from the interface after installing Ensim Pro. To open the online Help for a particular level:

- 1 Log on to the Ensim Pro control panel with your username and password.
- 2 On the left navigation bar of the control panel, click **Help**.

Document conventions

Throughout this guide, specific fonts are used to identify computer input, output, and interface elements. Table 1 lists the typographic conventions used in this guide.

Table 1. Typographic conventions

Appearance of text	How it is used
Narrow bold text (sans serif font)	Used for button names, column names, field names, file names, keystrokes, menu items, and path names. <i>Example:</i> Click Start , point to Settings , then click Control Panel .
Regular bold text (serif font)	Used for information you type. <i>Example:</i> On the command line, type continue
<i>Bold, italic text (serif font)</i>	Used for variables you replace with appropriate information. <i>Example:</i> Type < <i>servername</i> > where < <i>servername</i> > is the host name of your server.
Courier font	Used for system messages and screen text. <i>Example:</i> The following message is displayed: The server has been added.

Key information is sometimes displayed using special headings and formats to make it stand out from regular text. The following special headings are used in this guide:



Tip
Information to help you perform procedures



Note
Supplemental information about tasks or concepts



Important
Supplemental information that is more important than a note

 **Caution**

Warnings about potential damage to data or systems

 **Procedure**

Step-by-step instructions

 **Example**

Samples of code or other illustrative text

Feedback and support

For Ensim online support or feedback, use the following links:

- <http://support.ensim.com> to access product downloads and documentation
- <https://onlinesupport.ensim.com> to file a support ticket or request online support
- http://onlinesupport.ensim.com/kb_search_unify.asp to search the knowledge base
- <http://www.ensim.com/about/feedback.asp> to provide feedback to Ensim

 **Note**

All customers receive passwords that allow access to the Ensim Support site. If you do not have a password, contact your organization's liaison to Ensim.

Command Line Interface (CLI) Calls

Introduction

This chapter describes the Command Line Interface (CLI) calls that you can use to create, edit, view, and delete resellers, sites, or users on the Ensim Pro 4.0.1 for Windows 2003 server. You can also use the CLI calls to export and import site information. Instead of logging on to the Ensim Pro 4.0.1 control panel to run the functions described above, these calls can be executed directly from the command line.



Note

For simplicity, we refer to Ensim Pro 4.0.1 for Windows 2003 as "Ensim Pro" throughout this document.

Topics in this guide include:

- "How to execute CLI calls" on page 1-1
- "Overview of Command Line Interface (CLI) calls" on page 1-2
- "Adding an object" on page 1-3
- "Deleting an object" on page 1-9
- "Displaying the information of an object" on page 1-10
- "Updating the information of an object" on page 1-11
- "Exporting and importing site information" on page 1-23

How to execute CLI calls

This section includes instructions on how to use the CLI calls directly from the command line.



Procedure

To execute CLI calls:

- 1 Use a Terminal Services Client like **Remote Desktop Connection** to start a session on a Microsoft® Windows 2003 server running Ensim Pro.
- 2 In your terminal services session, open a command prompt window, then change to the directory where the CLI program files are located. For example, if you have installed Ensim Pro in the default **Program Files** directory, then run the following command at the prompt.

```
cd C:\Program Files\Ensim\WEBpliance\cli
```

- 3** Since all the arguments passed to the calls are in XML (eXtensible Markup Language) format, create an XML file using a standard text editor. This file will include all the arguments necessary for executing the call successfully.

 **Note**

You have two options available with each call: the “-f” (file) option and the “-s” (string) option. These two options are mutually exclusive, so you can use either one. The “-f” option allows you to specify the complete path where the XML file is located, while the “-s” option allows you to enter the XML data as a string.

We recommend that you create the XML file, save it, then use the “-f” option of the call to specify the location of this file. If you use the “-s” option, you cannot use line breaks in the file, and the entire XML data must be on a single line.

- 4** Run the calls with the parameters described in this guide and the results will be displayed accordingly.

 **Important**

Each call described in this guide includes an example of the XML file it needs to execute. **Do not change the format of the XML file while creating it.** You can replace the values of the parameters given in these examples.

If the values passed in the XML file are invalid, then the call fails with an error.

Overview of Command Line Interface (CLI) calls

This section describes the various calls that you can use to create, edit, view, and delete resellers, sites, or users directly from the command line. It also describes the calls to export and import site information. The six calls available in the **cli** directory are as follows:

- **addobj.exe:** Adds an object such as a reseller, a site or a user to the Ensim Pro database.
- **DeleteObj.exe:** Deletes an object from the Ensim Pro database.
- **GetInfoObj.exe:** Displays the configuration of an object.
- **UpdateObj.exe:** Updates the information for an object.
- **ExportObj.exe:** Exports the site information from the Ensim Pro control panel to a directory on the same server.
- **ImportObj.exe:** Imports the site information from its export directory to the Ensim Pro control panel.

The syntax for executing the above calls is similar, and is as follows:

- When the arguments are passed in the form of an XML file:
`<call name> -t <org / reseller / user / usertemplate> -f <location_of_XML_file> -u <username> -p <password>`

Example

To view the information of a reseller, run the following command using the “-f” option.

```
GetInfoObj.exe -t reseller -f C:\wwpcli\xml\getresellerinfo.xml -u admin -p ensimpro
```

where **getresellerinfo.xml** is an XML file containing all the parameters required to execute **GetInfoObj.exe** and located in the **C:\wwpcli\xml** directory.

- When the arguments are passed in the form of a string containing XML data:

```
<call name> -t <org / reseller / user / usertemplate> -s <XML_data_as_a_string> -u <username> -p <password>
```

Example

To view the information for a reseller “res1.com”, run the following command using the “-s” option.

```
GetInfoObj.exe -t reseller -s "<?xml version='1.0' encoding='utf-8'?><reseller><property name='Name'>res1.com</property><property name='ShortName'>res1sn</property>" -u admin -p ensimpro
```

where the string **<?xml version='1.0' encoding='utf-8'?><reseller><property name='Name'>res1.com</property><property name='ShortName'>res1sn</property></reseller>** contains all the parameters required to execute **GetInfoObj.exe** in XML format. Please note that the string is enclosed in double quotes (“”) and the tag values in single quotes (‘’).

Adding an object

Call Name: addobj.exe

Description: Adds an object such as a [reseller](#), a [site](#), a [user template](#), or a [user](#) to Ensim Pro.

Important

Before executing this call for a reseller or a site, the Ensim Pro control panel must contain a template for adding a new reseller or site. If a template does not exist, you must create a new template using the Ensim Pro control panel. For instructions on creating a new template, please refer to the online Help available in the Ensim Pro control panel by clicking **General Help** in the *Help* section on the left navigation panel.

Adding a reseller

Syntax:

- When the arguments are passed in the form of an XML file:
addobj.exe -t reseller -f <location_of_XML_file> -u <username> -p <password>
- When the arguments are passed in the form of a string containing XML data:
addobj.exe -t reseller -s <XML_data_as_a_string> -u <username> -p <password>

Arguments:

The parameters to be passed in the XML file for adding a reseller are given below.

```
<?xml version="1.0" encoding="utf-8" ?>

<reseller>

    <generalinfo>
        <property name="DisplayName">res1 name</property>
        <property name="Name">res1.com</property>
        <property name="ShortName">res1sn</property>
        <property name="TemplateName">resellerplan</property>
        <property name="ContactPhone">12345678</property>
        <property name="ContactEmail">abc@example.org</property>
    </generalinfo>
    <admin>
        <property name="FullName">Administrator</property>
        <property name="UserName">admin</property>
        <property name="Password">ensimpro</property>
        <property name="Email">xyz@example.org</property>
    </admin>
</reseller>
```

Adding a site

Syntax:

- When the arguments are passed in the form of an XML file:
addobj.exe -t org -f <location_of_XML_file> -u <username> -p <password>
- When the arguments are passed in the form of a string containing XML data:
addobj.exe -t org -s <XML_data_as_a_string> -u <username> -p <password>

Arguments:

The parameters to be passed in the XML file for adding a site are given below.

```

<?xml version="1.0" encoding="utf-8" ?>
<org>
    <generalinfo>
        <property name="DisplayName">site1 name</property>
        <property name="Name">site1.com</property>
        <property name="ShortName">site1sn</property>
        <property name="TemplateName">test</property>
        <property name="ContactEmail">abc@example.org</property>
    </generalinfo>
    <admin>
        <property name="DisplayName">Administrator</property>
        <property name="UserName">admin</property>
        <property name="Password">ensimpro</property>
        <property name="Email">xyz@example.org</property>
    </admin>
    <service name="WebHosting" version="2.0.0">
        <property name="Type">ipbased</property>
        <!-- Type can be either "namebased" or "ipbased". -->
        <property name="IPSelection">XX.XX.XX.XX</property>
        <!-- IPSelection is only used in case of IP-based sites. The value can either be "auto" for automatic IP address selection or the IP address. Do not include this parameter if you are adding a name-based site. -->
    </service>
</org>

```

Adding a user template

Syntax:

- When the arguments are passed in the form of an XML file:
addobj.exe -t usertemplate -f <location_of_XML_file> -u <username> -p <password>
- When the arguments are passed in the form of a string containing XML data:
addobj.exe -t usertemplate -s <XML_data_as_a_string> -u <username> -p <password>

Arguments:

The parameters to be passed in the XML file for adding a user template are given below. Please refer “[Description of parameters used for creating a user template and updating a user](#)” on page 1-7 for a detailed description of some of the parameters given below.

```
<?xml version="1.0" encoding="utf-8" ?>

<template>

    <generalinfo>
        <property name="name">test</property>
        <property name="description">Template added using cli</property>
        <property name="enabled">true</property>
        <property name="shortname">sitel&nlt;/property>
        <!-- shortname refers to the short name of the site to which this user template needs to be added. -->
    </generalinfo>
    <service name="WebHosting" version="2.0.0">
        <ServiceComponent name="w3svc" version="2.0.0" enabled="1">
            </ServiceComponent>
        <ServiceComponent name="msftpsvc" version="2.0.0" enabled="1">
            <property name="IISPermRead" type="System.boolean">true</property>
            <property name="IISPermWrite" type="System.boolean">false</property>
            <property name="UserLog" type="System.boolean">true</property>
            <property name="ContentUploader" type="System.boolean">false</property>
        </ServiceComponent>
        <ServiceComponent name="frontpage" version="2.0.0" enabled="1">
            <property name="ContentUploader" type="System.boolean">false</property>
        </ServiceComponent>
        <ServiceComponent name="mail" version="1.5.0" enabled="1">
            <property name="UserEnableWebAccess" type="System.boolean">false</property>
            <property name="UserEnableForwards" type="System.boolean">false</property>
            <property name="UserEnableAutoresponders" type="System.boolean">false</property>
        </ServiceComponent>
    </service>
</template>
```

Description of parameters used for creating a user template and updating a user

This section describes some of the parameters that are included in the XML files and passed to **addobj.exe** for creating a user template, and **UpdateObj.exe** for updating a user. **Table 1-1** describes the parameters included in the **ServiceComponent** sections used in the XML files.

Table 1-1. Description of parameters used for creating a user template and updating a user

Parameters	Type	Description of the parameter	Default value
ServiceComponent name: msftpsvc			
IISPermRead	Boolean	Enable read permission for IIS files	Must be manually specified as either true or false
ServiceComponent name: frontpage			
ContentUploader	Boolean	Allow user to access the site's Web site	Must be manually specified as either true or false
ServiceComponent name: mail			
UserEnableWebAccess	Boolean	Enable Web access to the user	Must be manually specified as either true or false
UserEnableForwards	Boolean	Enable forwards for the user	Must be manually specified as either true or false
UserEnableAutoresponders	Boolean	Enable autoresponders for the user	Must be manually specified as either true or false

Adding a user

Syntax:

- When the arguments are passed in the form of an XML file:
addobj.exe -t user -f <location_of_XML_file> -u <username> -p <password>
- When the arguments are passed in the form of a string containing XML data:
addobj.exe -t user -s <XML_data_as_a_string> -u <username> -p <password>

Arguments:

The parameters to be passed in the XML file for adding a user are given below.



The parameters that do not have a value specified below are **optional**, and therefore these tags can have **empty** values.

```
<?xml version="1.0" encoding="utf-8" ?>
<user>
    <property name="username">user1</property>
    <property name="password">ensimpro</property>
    <property name="template">test</property>
    <property name="firstname"></property>
    <property name="middlename"></property>
    <property name="lastname"></property>
    <property name="admin"></property>
    <property name="email"></property>
    <property name="phone"></property>
    <property name="description"></property>
    <property name="enabled">true</property>
    <property name="street"></property>
    <property name="city"></property>
    <property name="state"></property>
    <property name="country"></property>
    <!-- country should include the two-character alphabetic country code. For example, if you want to set country to United States, then specify US as its value. -->
    <property name="company"></property>
    <property name="department"></property>
    <property name="office"></property>
    <property name="shortname">site1sn</property>
    <!-- shortname refers to the short name of the site to which this user needs to be added. -->
</user>
```

Deleting an object

Call Name: DeleteObj.exe

Description: Deletes an object such as a [reseller](#), a [site](#), a [user template](#), or a [user](#).

Deleting a reseller

Syntax:

- When the arguments are passed in the form of an XML file:
DeleteObj.exe -t reseller -f <location_of_XML_file> -u <username> -p <password>
- When the arguments are passed in the form of a string containing XML data:
DeleteObj.exe -t reseller -s <XML_data_as_a_string> -u <username> -p <password>

Arguments:

The parameters to be passed in the XML file for deleting a reseller are given below.

```
<?xml version="1.0" encoding="utf-8" ?>
<reseller>
    <property name="Name">res1.com</property>
    <property name="ShortName">res1sn</property>
</reseller>
```

Deleting a site

Syntax:

- When the arguments are passed in the form of an XML file:
DeleteObj.exe -t org -f <location_of_XML_file> -u <username> -p <password>
- When the arguments are passed in the form of a string containing XML data:
DeleteObj.exe -t org -s <XML_data_as_a_string> -u <username> -p <password>

Arguments:

The parameters to be passed in the XML file for deleting a site are given below.

```
<?xml version="1.0" encoding="utf-8" ?>
<org>
    <property name="Name">site1.com</property>
    <property name="ShortName">site1sn</property>
</org>
```

Deleting a user template

Syntax:

- When the arguments are passed in the form of an XML file:

```
DeleteObj.exe -t usertemplate -f <location_of_XML_file> -u <username> -p <password>
```

- When the arguments are passed in the form of a string containing XML data:

```
DeleteObj.exe -t usertemplate -s <XML_data_as_a_string> -u <username> -p <password>
```

Arguments:

The parameters to be passed in the XML file for deleting a user template are given below.

```
<?xml version="1.0" encoding="utf-8" ?>  
<template>  
    <property name="name">test</property>  
</template>
```

Deleting a user

Syntax:

- When the arguments are passed in the form of an XML file:

```
DeleteObj.exe -t user -f <location_of_XML_file> -u <username> -p <password>
```

- When the arguments are passed in the form of a string containing XML data:

```
DeleteObj.exe -t user -s <XML_data_as_a_string> -u <username> -p <password>
```

Arguments:

The parameters to be passed in the XML file for deleting a user are given below.

```
<?xml version="1.0" encoding="utf-8" ?>  
<user>  
    <property name="name">user1@site1sn</property>  
</user>
```

Displaying the information of an object

Call Name: GetInfoObj.exe

Description: Displays the information of an object such as a [reseller](#), or a [site](#)

Displaying the information of a reseller

Syntax:

- When the arguments are passed in the form of an XML file:

```
GetInfoObj.exe -t reseller -f <location_of_XML_file> -u <username> -p <password>
```

- When the arguments are passed in the form of a string containing XML data:

GetInfoObj.exe -t reseller -s <XML_data_as_a_string> -u <username> -p <password>

Arguments:

The parameters to be passed in the XML file for displaying the information of a reseller are given below.

```
<?xml version="1.0" encoding="utf-8" ?>
<reseller>
  <property name="Name">res1.com</property>
  <property name="ShortName">res1sn</property>
</reseller>
```

Displaying the information of a site

Syntax:

- When the arguments are passed in the form of an XML file:

GetInfoObj.exe -t org -f <location_of_XML_file> -u <username> -p <password>

- When the arguments are passed in the form of a string containing XML data:

GetInfoObj.exe -t org -s <XML_data_as_a_string> -u <username> -p <password>

Arguments:

The parameters to be passed in the XML file for displaying the information of a site are given below.

```
<?xml version="1.0" encoding="utf-8" ?>
<org>
  <property name="Name">site1.com</property>
  <property name="ShortName">site1sn</property>
</org>
```

Updating the information of an object

Call Name: UpdateObj.exe

Description: Updates the information of an object such as a [reseller](#), a [site](#), or a [user](#).

Updating the information of a reseller

Syntax:

- When the arguments are passed in the form of an XML file:

UpdateObj.exe -t reseller -f <location_of_XML_file> -u <username> -p <password>

- When the arguments are passed in the form of a string containing XML data:

UpdateObj.exe -t reseller -s <XML_data_as_a_string> -u <username> -p <password>

Arguments:

The parameters to be passed in the XML file for updating the information of a reseller are given below.

```
<?xml version="1.0" encoding="utf-8" ?>

<reseller>

    <generalinfo>
        <property name="DisplayName">res1_name</property>
        <property name="ContactName">res1</property>
        <property name="ShortName">res1sn</property>
        <property name="ContactPhone">12345678</property>
        <property name="ContactEmail">abc@example.org</property>
    </generalinfo>
    <service add="0" > <!-- If the add flag is equal to "0", then the quota defined below is decreased by the value specified. If the flag is equal to "1", then the quota is increased by the value specified. -->
        <!-- If you want to set the value of a quota as unlimited, then the value of that quota should be set to "-1" and the add flag set to "1". If a quota has unlimited value, and you want to remove it, then set the value of the quota to "-1" and the add flag to "0".-->
        <property quota="Disk Space">0</property>
        <property quota="Number of Installations of MSDE">0</property>
        <property quota="Number of Installations of mysql">1</property>
        <property quota="Number of Installations of w3svc">2</property>
        <property quota="Number of Installations of webalizer">3</property>
        <property quota="Bandwidth">0</property>
        <property quota="Number of Installations of Power Tools">4</property>
        <property quota="Number of Installations of frontpage">0</property>
        <property quota="# of Access DSNs">5</property>
        <property quota="Number of Installations of msftpsvc">0</property>
        <property quota="Number of Installations of php">4</property>
        <property quota="# of SubDomains">3</property>
        <property quota="# of DNS Zones">2</property>
        <property quota="Number of Installations of perl">1</property>
        <property quota="# of SQL DSNs">0</property>
        <property quota="Number of Users">0</property>
        <property quota="Number of Installations of odbc">0</property>
        <property quota="Number of Installations of Coldfusion">0</property>
```

```

<property quota="Number of Installations of filemanager">0</
property>
<property quota="Instances of DNS">5</property>
</service>
</reseller>

```

Updating the information of a site

Syntax:

- When the arguments are passed in the form of an XML file:
UpdateObj.exe -t org -f <location_of_XML_file> -u <username> -p <password>
- When the arguments are passed in the form of a string containing XML data:
UpdateObj.exe -t org -s <XML_data_as_a_string> -u <username> -p <password>

Arguments:

The parameters to be passed in the XML file for updating the information of a site are given below. Please refer “[Description of parameters used for updating a site](#)” on page 1-17 for a detailed description of some of the parameters given below.

```

<?xml version="1.0" encoding="utf-8" ?>

<org>
  <generalinfo>
    <property name="DisplayName">site1 name</property>
    <property name="ContactName">site1</property>
    <property name="ShortName">site1sn</property>
    <property name="ContactPhone">12345678</property>
    <property name="ContactEmail">abc@example.org</property>
  </generalinfo>
  <admin>
    <property name="DisplayName">Administrator</property>
    <property name="UserName">admin</property>
    <property name="Password">ensimpro</property>
    <property name="Email">xyz@example.org</property>
  </admin>
  <service name="WebHosting" version="2.0.0">
    <generalinfo>
      <property name="IsIpbased" type="System.boolean">false</
property>
      <property name="IPSelection" type="System.boolean">false</
property>
      <property name="ip" type="string">XX.XX.XX.XX</property>
      <!-- For a name-based site, the above parameter should contain the IP address of
that site. -->
    
```

```

<property name="BandwidthQuota" type="System.Int32">11</
property>
<property name="BillingCycleStartDay" type="System.Int32">11</
property>
<property name="BandwidthActionSendMail"
type="System.boolean">false</property>
<property name="BandwidthCapped" type="System.boolean">true</
property>
<property name="DiskQuota" type="System.Int32">110</property>
<property name="MaxUsers" type="System.Int64">6</property>
</generalinfo>
<ServiceComponent name="msdns" version="2.0.0" enabled="1">
<!-- If the enabled flag is equal to "1", then the service component is added or updated.
If the flag is equal to "0", then the service component is deleted. --&gt;
&lt;property name="NumDNSZones" type="System.double"&gt;1&lt;/property&gt;
&lt;property name="AllowSubdomainsOnly"
type="System.boolean"&gt;true&lt;/property&gt;
&lt;property name="AllowReverseZone" type="System.boolean"&gt;true&lt;/
property&gt;
&lt;/ServiceComponent&gt;
&lt;ServiceComponent name="msftpsvc" version="2.0.0" enabled="1"&gt;
&lt;property name="UserIsolationMode" type="System.Int32"&gt;0&lt;/
property&gt;
&lt;property name="AnonymousConnections"
type="System.boolean"&gt;false&lt;/property&gt;
&lt;property name="MaxConnections" type="System.Int64"&gt;1000&lt;/
property&gt;
&lt;property name="Timeout" type="System.UInt32"&gt;800&lt;/property&gt;
&lt;property name="SiteLogs" type="System.boolean"&gt;true&lt;/property&gt;
&lt;property name="LogType" type="String"&gt;W3C Extended Log File
Format&lt;/property&gt;
&lt;property name="FtpPort" type="System.Int32"&gt;1000X&lt;/property&gt;
<!-- Do not include this parameter if you are updating an IP-based site. For more
details about this parameter, please refer <a href="#">FtpPort in Description of parameters used
for updating a site. -->
<property name="IISPermRead" type="System.boolean">true</
property>
<property name="IISPermWrite" type="System.boolean">false</
property>
<property name="MessageWelcome" type="String">Welcome to our
site</property>
<property name="MessageExit" type="String">Thank you for
visiting our site</property>

```

```

<property name="MessageMaxClients" type="String">There are too
many users logged into our site. Please try later</property>
</ServiceComponent>
<ServiceComponent name="filemanager" version="2.0.0" enabled="1"/>
<ServiceComponent name="perl" version="2.0.0" enabled="1"/>
<ServiceComponent name="urchin" version="2.0.0" enabled="1"/>
<ServiceComponent name="webalizer" version="1.0.0" enabled="1"/>
<ServiceComponent name="msde" version="1.5.0" enabled="1"/>
<ServiceComponent name="mysql" version="1.5.0" enabled="1"/>
<ServiceComponent name="coldfusion" version="1.0.0" enabled="1"/>
<ServiceComponent name="w3svc" version="2.0.0" enabled="1">
<property name="EnableDotNet" type="System.boolean">false</
property>
<property name="DefaultSSL" type="System.boolean">false</
property>
<property name="SharedSSL" type="System.boolean">false</
property>
<property name="SharedSSLHost" type="String">host.example.org</
property>
<property name="SSI" type="System.boolean">true</property>
<property name="HostHeaders" type="System.boolean">true</
property>
<property name="UseAsPDH" type="System.boolean">false</
property>
<property name="MaxSubDomains" type="System.Int32">10</
property>
<property name="LogType" type="String">W3C Extended Log File
Format</property>
<property name="ChangeLogFileFormat" type="System.boolean">true</
property>
<property name="Timeout" type="System.Int32">900</property>
<property name="MaxConnections" type="System.Int32">1000</
property>
<property name="Hits" type="System.Int32">1</property>
<property name="ReverseDNS" type="System.boolean">false</
property>
<property name="EnableBWQuota" type="System.boolean">false</
property>
<property name="BandwidthQuota" type="System.Int32">1024</
property>
<property name="IISPermRead" type="System.boolean">true</
property>

```

```
<property name="IISPermWrite" type="System.boolean">false</property>
<property name="IISPermDirectoryBrowsing" type="System.boolean">false</property>
<property name="IISPermExec" type="System.Int32">1</property>
<property name="CPUUrl" type="String">https://example.org/admin</property>
</ServiceComponent>
<ServiceComponent name="frontpage" version="2.0.0" enabled="1">
<property name="EnableAuthoring" type="System.boolean">true</property>
<property name="RequireSSL" type="System.boolean">false</property>
<property name="MailSender" type="String">abc@xyz.com</property>
<property name="MailReplyTo" type="String">def@xyz.com</property>
<property name="SMTPHost" type="String">smtp.xyz.com</property>
</ServiceComponent>
<ServiceComponent name="php" version="2.0.0" enabled="1">
<property name="PhpType" type="System.Int32">1</property>
</ServiceComponent>
<ServiceComponent name="odbc" version="2.0.0" enabled="1">
<property name="TotalSQLDSNCount" type="System.Int32">5</property>
<property name="TotalAccessDSNCount" type="System.Int32">5</property>
</ServiceComponent>
<ServiceComponent name="mail" version="1.5.0" enabled="1">
<property name="EnableMailingLists" type="System.boolean">false</property>
<property name="EnableDomainAliases" type="System.boolean">false</property>
<property name="EnableDistributionLists" type="System.boolean">true</property>
<property name="EnableSpamFilters" type="System.boolean">true</property>
<property name="EnableUserAliases" type="System.boolean">true</property>
<property name="EnableWebAccess" type="System.boolean">true</property>
<property name="EnableForwards" type="System.boolean">true</property>
```

```

<property name="EnableAutoresponders"
  type="System.boolean">true</property>
</ServiceComponent>
<ServiceComponent name="powertools" version="2.0.0" enabled="1">
  <property name="PowerToolList" type="System.Int32 [] ">1,2</
  property>
</ServiceComponent>
</service>
</org>

```

Description of parameters used for updating a site

This section describes some of the parameters that are included in the XML files and passed to **UpdateObj.exe** for updating a site. [Table 1-2](#) describes the parameters included in the **Service** and **ServiceComponent** sections used in the XML files.

Table 1-2. Description of parameters used for updating a site

Parameters	Type	Description of the parameter	Default value
Service name: WebHosting			
ip	String	IP address of the site	Must be manually specified
IsIpbased	Boolean	Is the site an IP-based site?	False
IPSelection	Boolean	Was the IPSelection parameter equal to "auto" or did it include the IP address when the site was created? If its value was "auto", then the value of this parameter should be "False". If it included the IP address, then the value of this parameter should be "True". Note: This parameter should be used only for IP-based sites.	False
BillingCycleStartDay	Integer	Start of the billing cycle (day of the month). Its value ranges from 1 to 31.	Must be manually specified
BandwidthActionSendMail	Boolean	Send a mail on exceeding the bandwidth usage	True
BandwidthCapped	Boolean	Redirect the user to the "bandwidth exceeded" page on crossing the limit	False
BandwidthQuota	Integer	Bandwidth quota limit Note: If BandwidthQuota = -1, then its value is set as unlimited.	1024
DiskQuota	Integer	Maximum disk space allowed Note: If DiskQuota = -1, then its value is set as unlimited.	25

Table 1-2. Description of parameters used for updating a site (continued)

Parameters	Type	Description of the parameter	Default value
MaxUsers	Long	Maximum number of users allowed Note: If Number of Users = -1, then its value is set as unlimited.	5
ServiceComponent name: msdns			
NumDNSZones	Integer	Number of DNS zones	5
AllowSubdomainsOnly	Boolean	Prevent the site from adding arbitrary zones (sub-zones allowed)	True
AllowReverseZone	Boolean	Allow the site to add reverse records	False
ServiceComponent name: w3svc			
EnableDotNet	Boolean	Enable ASP.NET for the site	False
SSI	Boolean	Enable Server Side Includes for the site	True
ThirdPartySSL CertificateInstalled	Boolean	Is a third-party SSL certificate installed?	False
DefaultSSL	Boolean	Enable Default SSL certificate Note: This parameter should be used only for IP-based sites.	False
SSL	Boolean	Enable SSL	False
SiteLogs	Boolean	Enable site logging	True
SharedSSLHost	String	FQDN of the SSL host	Must be manually specified Example. host.example.org
HostHeaders	Boolean	Enable host headers	True
UseAsPDH	Boolean	Use as a Park Domain Host	False
MaxSubDomains	Integer	Maximum number of sub-domains Note: If MaxSubDomains = -1, then its value is set as unlimited.	10
LogType	String	Format of the log file The value of LogType can be either one of the values given below. <ul style="list-style-type: none">• W3C Extended Log File Format• Microsoft IIS Log File Format• NCSA Common Log File Format	W3C Extended Log File Format
ChangeLogFormat	Boolean	Allow log formats to be changed	True
MaxConnections	Integer	Maximum number of connections Note: If MaxConnections = -1, then its value is set as unlimited.	1000
Timeout	Integer	Web server connection timeout	900 seconds

Table 1-2. Description of parameters used for updating a site (continued)

Parameters	Type	Description of the parameter	Default value
Hits	Integer	Expected number of hits per day • If Hits = 0, the number of hits expected per day is less than 10000. • If Hits = 1, the number of hits expected per day is less than 100000. • If Hits = 2, the number of hits expected per day is more than 100000.	1 (less than 100000)
ReverseDNS	Boolean	Enable Reverse DNS lookup	True
EnableBWQuota	Boolean	Allow bandwidth usage to be controlled	False
BandwidthQuota	Integer	Maximum bandwidth usage allowed	1024
IISPermRead	Boolean	Enable read permission for IIS files	True
IISPermWrite	Boolean	Enable write permission for IIS files	False
IISPermDirectoryBrowsing	Boolean	Enable Directory Browsing	False
IISPermExec	Integer	Permissions for executing files • If IISPermExec = 0, scripts and executables are not allowed. • If IISPermExec = 1, only scripts are allowed. • If IISPermExec = 2, both CGI scripts and executables are allowed.	1 (Allow only scripts)
IISApplProtection	Integer	Pool type • If IISApplProtection = 0, it is a shared pool. • If IISApplProtection = 1, it is a dedicated pool.	0 (shared pool)
CPUrl	String	URL of the control panel	Name of the server.
ServiceComponent name: msftpsvc			
MaxConnections	Long	Maximum number of connections Note: If MaxConnections = -1, then its value is set as unlimited.	5
AnonymousConnections	Boolean	Enable anonymous connections	False
UserIsolationMode	Integer	Method for isolation users (Custom method/Native IIS 6) • If UserIsolationMode = 0, Custom method is used. • If UserIsolationMode = 1, Native IIS 6 method is used.	0 (Custom method)

Table 1-2. Description of parameters used for updating a site (continued)

Parameters	Type	Description of the parameter	Default value
FtpPort	Integer	FTP port number Note: Do not include this parameter if you are updating an IP-based site. For a name-based site, its value is 1000X, ranging from 10000 to 65535.	Must be manually specified.
Timeout	Integer	Connection timeout period	900
SiteLogs	Boolean	Enable site logs	True
LogType	String	Select the type of log The value of LogType can be either one of the values given below. <ul style="list-style-type: none">• W3C Extended Log File Format• Microsoft IIS Log File Format	W3C Extended Log File Format
IISPermRead	Boolean	Enable download permission for IIS files	True
IISPermWrite	Boolean	Enable upload permission for IIS files	False
MessageExit	String	Exit message	Exit message
MessageWelcome	String	Welcome message	Welcome message
MessageMaxClients	String	Message when the connection reaches the maximum limit	Maximum connection message
ServiceComponent name: frontpage			
RequireSSL	Boolean	Enable HTTPS Secure Communications Note: This parameter should be used only for IP-based sites.	False
EnableAuthoring	Boolean	Enable authoring	True
MailSender	String	Address of the sender	Must be manually specified
MailReplyTo	String	Address of the receiver	Must be manually specified
SMTPHost	String	SMTP mail server	Must be manually specified
ServiceComponent name: php			
PhpType	Integer	Configure PHP as CGI/ISAPI <ul style="list-style-type: none">• If PhpType = 0, it is ISAPI.• If PhpType = 1, it is CGI.	1 (CGI)

Table 1-2. Description of parameters used for updating a site (continued)

Parameters	Type	Description of the parameter	Default value
ServiceComponent name: odbc			
TotalSQLDSNCount	Integer	Maximum number of SQL data sources allowed Note: If TotalSQLDSNCount = -1, then its value is set as unlimited.	5
TotalAccessDSNCount	Integer	Maximum number of Microsoft Access data sources allowed Note: If TotalAccessDSNCount = -1, then its value is set as unlimited.	5
ServiceComponent name: Mail			
EnableMailingLists	Boolean	Enable mailing lists	False
EnableDomainAliases	Boolean	Enable domain aliases	False
EnableDistributionLists	Boolean	Enable distribution lists	True
EnableSpamFilters	Boolean	Enable spam filters	True
EnableUserAliases	Boolean	Enable user aliases	True
EnableWebAccess	Boolean	Enable Web access	True
EnableForwards	Boolean	Enable forwards	True
EnableAutoresponders	Boolean	Enable autoresponders	True
ServiceComponent name: Powertools			
PowerToolList	Array of integers	List of Power Tools 1 is for Gallery, 2 for WordPress Web log, and 3 for PhpBB bulletin board	Must be manually specified Example. 1,2,3 for all three tools

Updating the information of a user

Syntax:

- When the arguments are passed in the form of an XML file:
UpdateObj.exe -t user -f <location_of_XML_file> -u <username> -p <password>
- When the arguments are passed in the form of a string containing XML data:
UpdateObj.exe -t user -s <XML_data_as_a_string> -u <username> -p <password>

Arguments:

The parameters to be passed in the XML file for updating the information of a user are given below. Please refer “[Description of parameters used for creating a user template and updating a user](#)” on page 1-7 for a detailed description of some of the parameters given below.



The parameters that do not have a value specified below are **optional**, and therefore these tags can have **empty** values.

```
<?xml version="1.0" encoding="utf-8" ?>

<user>

    <generalinfo>
        <property name="username">user1@site1sn</property>
        <property name="firstname"></property>
        <property name="middlename"></property>
        <property name="lastname"></property>
        <property name="admin"></property>
        <property name="email"></property>
        <property name="phone"></property>
        <property name="description"></property>
        <property name="enabled">true</property>
        <property name="street"></property>
        <property name="city"></property>
        <property name="state"></property>
        <property name="country"></property>
        <!-- country should include the two-character alphabetic country code. For example,
            if you want to set country to United States, then specify US as its value. -->
        <property name="company"></property>
        <property name="department"></property>
        <property name="office"></property>
        <property name="shortname">site1sn</property>
        <!-- shortname refers to the short name of the site to which this user needs to be
            added. -->
    </generalinfo>
    <service name="WebHosting" version="2.0.0">
        <ServiceComponent name="w3svc" version="2.0.0" enabled="1">
        </ServiceComponent>
        <ServiceComponent name="msftpsvc" version="2.0.0" enabled="1">
            <property name="IISPermRead" type="System.boolean">true</
                property>
            <property name="IISPermWrite" type="System.boolean">false</
                property>
            <property name="UserLog" type="System.boolean">true</
                property>
            <property name="ContentUploader"
                type="System.boolean">false</property>
        </ServiceComponent>
        <ServiceComponent name="frontpage" version="2.0.0" enabled="1">
            <property name="ContentUploader"
                type="System.boolean">false</property>
    </ServiceComponent>

```

```

</ServiceComponent>
<ServiceComponent name="mail" version="1.5.0" enabled="1">
    <property name="UserEnableWebAccess"
    type="System.boolean">false</property>
    <property name="UserEnableForwards"
    type="System.boolean">false</property>
    <property name="UserEnableAutoresponders"
    type="System.boolean">false</property>
</ServiceComponent>
</service>
</user>

```

Exporting and importing site information

The Export CLI call allows you to capture and store the current state of a site. The Import CLI call allows you to restore a site to the state when it was exported. This feature allows you to restore the original state of a site in case the entire data or a specific service of that site is corrupted.

You can export and import a site with the following options:

- Configuration settings of the site and all its users
- Configuration settings of the site and its default site administrator
- Configuration settings and service-specific data of the site and all its users
- Configuration settings and service-specific data of the site and its default site administrator

You can export and import site information using the **ExportObj.exe** and **ImportObj.exe** calls. Both calls use the same XML format for passing the parameters.

Exporting site information

Call Name: ExportObj.exe

Description: Exports the site information from the Ensim Pro control panel to a directory on the same server.

Syntax:

- When the arguments are passed in the form of an XML file:
ExportObj.exe -t org -f <location_of_XML_file> -u <username> -p <password>
- When the arguments are passed in the form of a string containing XML data:
ExportObj.exe -t org -s <XML_data_as_a_string> -u <username> -p <password>

Importing site information

Call Name: ImportObj.exe

Description: Imports the site information from its export directory to the Ensim Pro control panel.

Syntax:

- When the arguments are passed in the form of an XML file:
ImportObj.exe -t org -f <location_of_XML_file> -u <username> -p <password>
- When the arguments are passed in the form of a string containing XML data:
ImportObj.exe -t org -s <XML_data_as_a_string> -u <username> -p <password>

Arguments:

The parameters to be passed in the XML file for exporting or importing the site information are given below.

```
<?xml version="1.0" encoding="utf-8" ?>
<orglist>
  <org name="site1.com">
    <property name="ShortName" type="string">site1sn</property>
    <property name="ExportImportPath"
      type="string">c:\exportimport</property>
    <property name="ConfigOnly" type="System.Boolean">false</
      property> <!-- To export or import only the configuration settings of a site, set the
      ConfigOnly flag to "true". To export or import both the configuration settings and
      the data of a site, set the ConfigOnly flag to "false".-->
    <property name="WithAllUsers" type="System.Boolean">false</
      property> <!-- To export or import the information of all users, set the
      WithAllUsers flag to "true". To export or import the information of only the default
      site administrator, set the WithAllUsers flag to "false".-->
  </org>
</orglist>
```

Changing the network settings of your server

Introduction

This section includes the instructions for changing the network settings of the Ensim Pro server.

Changing the network settings of Ensim Pro server

This section describes the process of changing the network settings of your Ensim Pro server using either **Networkconfiguration.exe** or **NetworkconfigurationCLI.exe**.

Networkconfiguration.exe and **NetworkconfigurationCLI.exe** are tools included with Ensim Pro that allows you to change the IP address and the Fully Qualified Domain Name (FQDN) of the server on which Ensim Pro is installed. This utility will change the IP address of all name-based sites that use the IP address of the Ensim Pro server.

Note

Please notify the site administrators about the change in the IP address for these name-based sites.

You can change the network settings of your Ensim Pro server by either using the [graphical interface](#) provided by **Networkconfiguration.exe**, or using the [command line interface \(CLI\)](#) provided by **NetworkconfigurationCLI.exe**.

Using the graphical interface (Networkconfiguration.exe)


This section provides instructions for using Networkconfiguration.exe to change the network settings of your Ensim Pro server.

Procedure

To change the network settings of Ensim Pro server using the graphical interface:

- 1 Connect to the Ensim Pro server using the console or terminal services and log on as the administrator.
- 2 Browse to `<Ensim_Pro_install_path>\cp\admin\bin` directory, where `<Ensim_Pro_install_path>` is the location of the Ensim Pro installation directory. If Ensim Pro is installed in the default location, then the path is `C:\Program Files\Ensim\WEBpliance\cp\admin\bin`.
- 3 Run **Networkconfiguration.exe** located in this directory.

The *Network Settings* window opens.

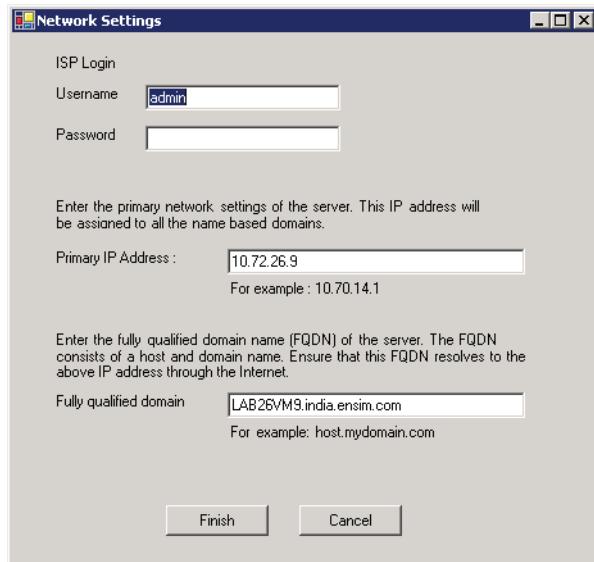


- In the *Network Settings* window, enter the Server Administrator's password, the new IP address, and the new FQDN of the server.


Important

Please ensure that the new IP address is present in the list of IP addresses in the network settings of your server's network card. To add a new IP address to the list, please refer "[Adding a new IP address to your server's network card](#)" on page 2-5.

- Click **Finish**.

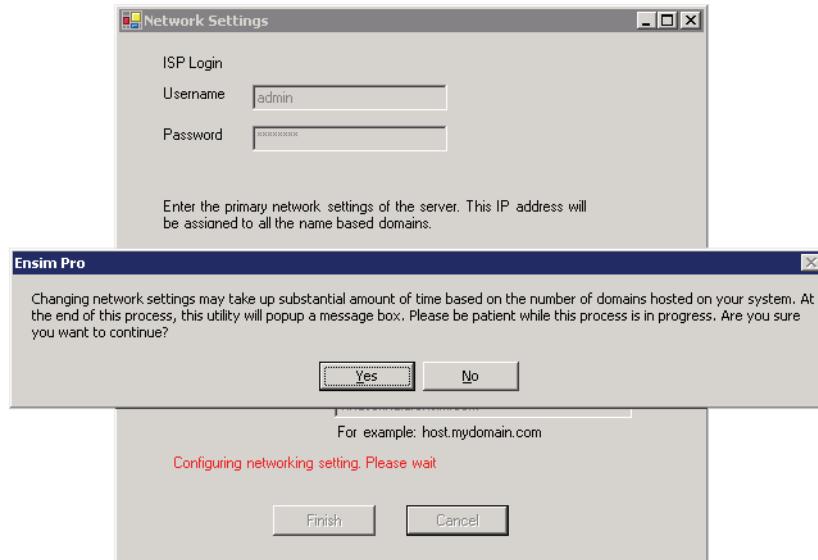

- Click **Yes**.

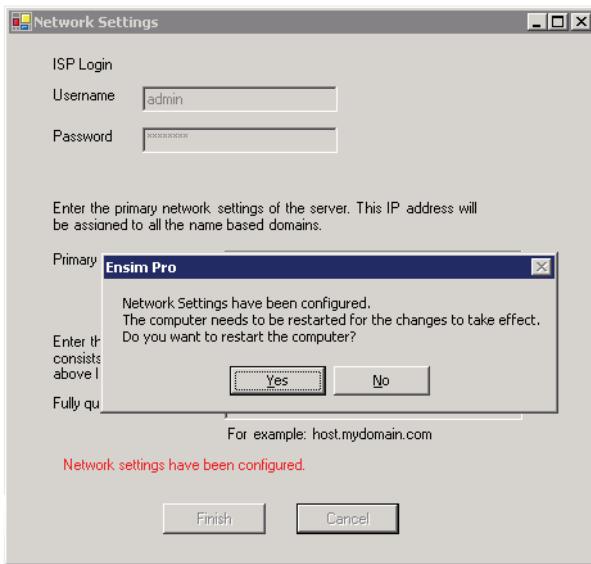

- 7 After the network settings have been changed, click **Yes** to restart the server and **No** to cancel the restart.

The network settings of the server are changed after it is restarted.

- 8 To confirm the new settings of the Ensim Pro server:

- a Open your Web browser.
- b In the **Address** field of your Web browser, type the URL: https://<server_name>/cp where *<server_name>* is the FQDN or IP address of the Ensim Pro server. The Log in page opens.
- c In the **username** text box, type **admin**.
- d In the **password** text box, enter your password.
- e Click **Log In**.

The server administrator home page opens.

Using the command line interface (NetworkconfigurationCLI.exe)

This section provides instructions for using NetworkconfigurationCLI.exe to change the network settings of your Ensim Pro server.

Procedure

To change the network settings of Ensim Pro server using the CLI:

- 1 Connect to the Ensim Pro server using the console or terminal services and log on as the administrator.
- 2 Open a command window, and change to *<Ensim_Pro_install_path>\cp\admin\bin* directory, where *<Ensim_Pro_install_path>* is the location of the Ensim Pro installation directory. If Ensim Pro is installed in the default location, then the path is **C:\Program Files\Ensim\WEBpliance\cp\admin\bin**.

- 3 Type the following command on the command line.

NetworkconfigurationCLI.exe <server_IP_address> <server_FQDN> <username> <password> <restart_now>

where:

- <server_IP_address> is the new IP address of the Ensim Pro server
- <server_FQDN> is the new Fully Qualified Domain Name (FQDN) of the server

Note

If you want to change only one parameter, either the server's IP address or its FQDN, ensure that you enter the current value of the other parameter.

- <username> is the server administrator's login name for logging onto the Ensim Pro control panel.
- <password> is the server administrator's password for logging onto the Ensim Pro control panel
- <restart_now> refers to whether you want to restart the server after executing the command or not. If you want to restart the server, type **yes**; if not, type **no**.

Note

The network settings of the server are changed only **after** it is restarted.

Example

If you want to change your Ensim Pro server's IP address to 192.0.34.166, and its FQDN to example.net, then run the following command.

NetworkconfigurationCLI.exe 192.0.34.166 example.net admin ensimpro yes

Example

If you want to change only the server's IP address to 192.0.34.100, then run the following command with the server's current FQDN.

NetworkconfigurationCLI.exe 192.0.34.100 example.net admin ensimpro yes

Adding a new IP address to your server's network card

This section describes the process of adding a new IP address to the list of IP addresses in the network settings of your server's network card.

Procedure

To add a new IP address:

- 1 Click **Start > Settings > Control Panel**.
- 2 Double-click **Network Connections**. The *Network Connections* window opens.
- 3 In the *Network Connections* window, right-click **Local Area Connections** (or the network connection you are using with Ensim Pro) and choose **Properties**. The *Local Area Connections* window opens.
- 4 In the *Local Area Connections* window, select **Internet Protocol (TCP/IP)** and click **Properties**. The *Internet Protocol (TCP/IP)* window opens.
- 5 In the *Internet Protocol (TCP/IP)* window, click **Advanced**. The *Advanced TCP/IP Settings* window opens displaying the *IP Settings* tab.
- 6 In the *IP addresses* section, click **Add**. The *TCP/IP Address* window opens.
- 7 In the *TCP/IP Address* window, enter the new IP address and the Subnet mask of the network, and click **Add**.
- 8 To confirm the addition of a new IP address, in the *Advanced TCP/IP Settings* window, verify that the new IP address is displayed.

The new IP address is successfully added to your server's network card.

Index

A

Adding a new IP address [2-5](#)
Adding a reseller [1-4](#)
Adding a site [1-4](#)
Adding a user [1-8](#)
Adding a user template [1-5](#)
 description of parameters [1-7](#)

 description of parameters [1-17](#)
Updating a user [1-21](#)
 description of parameters [1-7](#)

C

Changing network settings of your server [2-1](#)
Command Line Interface (CLI) calls [1-1](#)
 executing [1-1](#)
 overview [1-2](#)

D

Deleting a reseller [1-9](#)
Deleting a site [1-9](#)
Deleting a user [1-10](#)
Deleting a user template [1-10](#)
Displaying the information of a reseller [1-10](#)
Displaying the information of a site [1-11](#)

E

Exporting a site [1-23](#)

I

Importing a site [1-23](#)

N

Network configuration utility [2-1](#)
 using its command line interface (CLI) [2-3](#)
 using its graphical interface [2-1](#)

U

Updating a reseller [1-11](#)
Updating a site [1-13](#)

Legal and copyright notice

This document contains information proprietary to Ensim Corporation and its receipt or possession does not convey any rights to reproduce, disclose, manufacture, or sell anything it might describe. Reproduction, disclosure, or use without Ensim's specific written authorization is strictly forbidden.

Ensim Corporation makes no representations or warranties with respect to the contents or use of this document. It also reserves the right to revise this publication and make changes to the content at any time, without the obligation to notify any person or entity of such revisions or changes.

Further, Ensim Corporation assumes no responsibility or liability for any errors or inaccuracies, makes no warranty of any kind (express, implied or statutory) with respect to the contents or use of the information, and expressly disclaims any and all warranties of merchantability, fitness for particular purposes, and non-infringement of third party rights.

Ensim and the Ensim logo are registered trademarks of Ensim Corporation.

All other trademarks are the property of their respective owners.

© 2005 Ensim Corporation. All rights reserved.

CORPORATE HEADQUARTERS

Ensim Corporation
1366 Borregas Avenue
Sunnyvale, CA 94089
(408) 745-3300

www.ensim.com

epw401_techref_3

LEGAL AND COPYRIGHT NOTICE